


## Central Controller CE52-24/F(C)

The centralized controller is applicable to multi VRF units and U-match connectable with network of indoor units or the network of outdoor units. One centralized controller can control up to 16 sets of outdoor system and up to 255 sets of indoor unit.

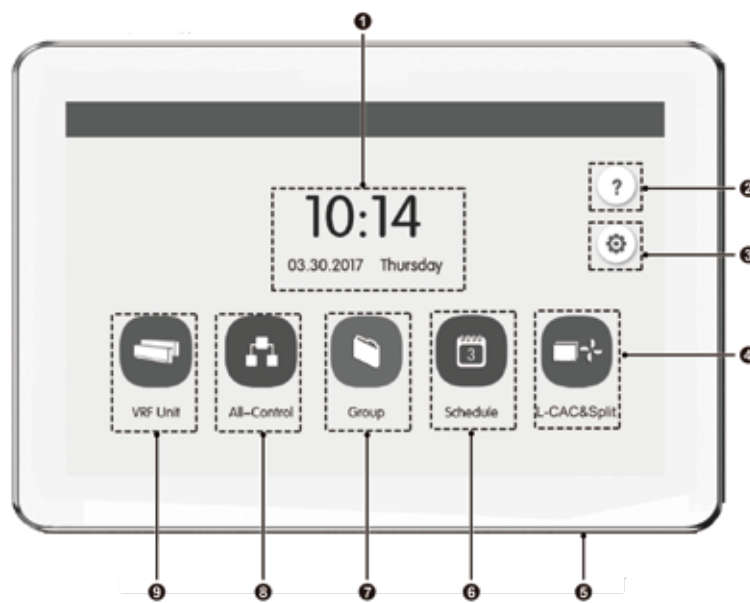

No.	Name	Instructions
1	Time zone	The present date, week and time.
2	Help button	Press this button to enter Help Info page.
3	Setting button	Press this button to enter setting page.
4	L-CAC&Split unit button	Press this button to enter L-CAC&Split unit page.
5	Touch button	<ul style="list-style-type: none"> <li>• Press the Touch Button to turn on/off the screen of centralized controller.</li> <li>• Press and hold the Touch Button for 5sec to restart to centralized controller.</li> </ul>
6	Schedule button	Press this button to enter schedule page.
7	Group button	Press this button to enter group page.
8	All-Control button	Press this button to enter All-Control page.
9	VRF Unit button	Press this button to enter indoor units, water/floor units or fresh air units control page.

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

## Outline and Physical Dimensions of CE52-24/F(C).

Unit: mm(inch)

