

Submittal Data: XK76

XK76 Command Center for Ductfree Split Systems

| | | |
|------------------|--------------|--|
| Job Name | Location | Date |
| Purchaser | Engineer | |
| Submitted To | For | <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction |
| Unit Designation | Schedule No. | |

GENERAL FEATURES

- Tactile feedback keypad
- Easy setup and 7 day programming
- Sleek thin design blends into any décor
- Reaches up to 26 feet.
- Convenient LCD display backlighting
- Ready to use cable included.
- No Batteries Required
- 115V or 230V Single Zone Compatible



Compatible with the following Models:

| Indoor Models | Model Numbers |
|----------------|-----------------|
| Vireo / Vireo+ | VIRxxHPxxxV1xH |
| Vireo GEN3 | 3VIRxxHPxxxV1xH |
| Livo / Livo+ | LIVSxxHPxxxV1xH |
| Livo GEN3 | LIVVxxHPxxxV1xH |
| Livo GEN4 | 4LIVxxHPxxxV1xH |
| Sapphire | SAPxxHPxxxV1xH |

XK76 Command Center allows fast & easy access to a large number. The following is a list of typical features and functions support by the X76 controller:

Note: Some indoor models may not support specific system features or functions.

Always refer to the indoor unit Owner's Manual for a complete list of feature and functions.

On/Off - The On/Off button allows you to start and stop the system.

Operating Mode - Allows users to select an operating mode (i.e. Cooling, Heating, Dry, and Fan Only).

Fan Speed -The indoor fan (i.e. High, Medium, Low & Auto) can be adjusted for peak comfort and quietness.

Room Setpoint – Adjust room setpoint temperature between 61 deg F to 86 deg F (16 ~ 30 range).

Timer Mode - Program a One time period (i.e. 0.5-24 hr.) to which the system will turn ON or OFF.

Daily Schedule - Allows 8 programmable time/temperature segments per day.

Weekly Schedule - Allows 7-day programming with 8 time/temperature segments per day.

Freeze Guard - Room Freeze Guard protection will maintain room temperature above 46° F.

Sleep Mode – Automatically adjust room temperature during your sleep time (i.e. 0.5-24 hr. range).

Turbo Mode – Turbo will force system to run at higher speeds to reach the desired room temperature faster. **X-**

Fan Mode - Removes moisture build up on coil when the system is turned OFF to prevent mold and mildew.


Privacy Lock - Privacy Lock to prevent unauthorized access to the controls and tampering with system settings.

Service Codes - Automatically display service codes generated by the system.

DIMENSIONAL SPECIFICATIONS


XK76 Command Center for Ductfree Split Systems

Units: inch (mm)

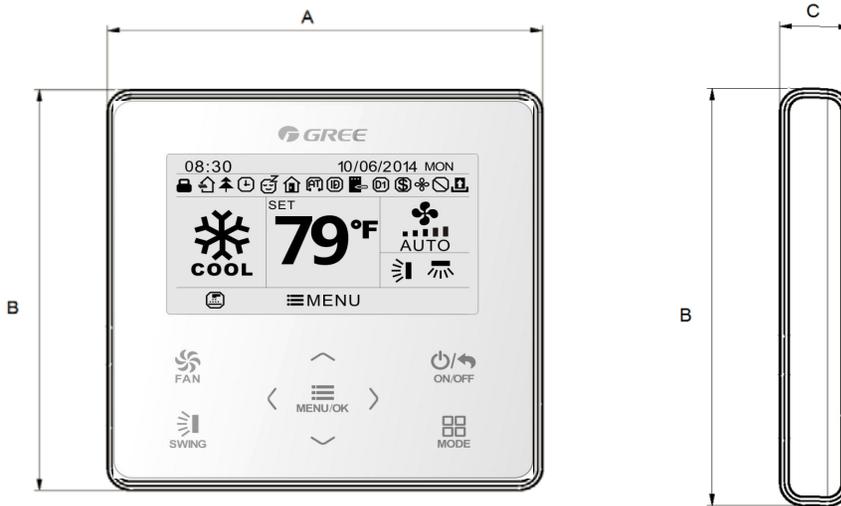

| Type | Part Number | A | B | C |
|------|-------------|-------------|-------------|------------|
| XK76 | MC20700360 | 4.375 (111) | 4.375 (111) | 1.125 (28) |

SYSTEM WIRING DIAGRAM

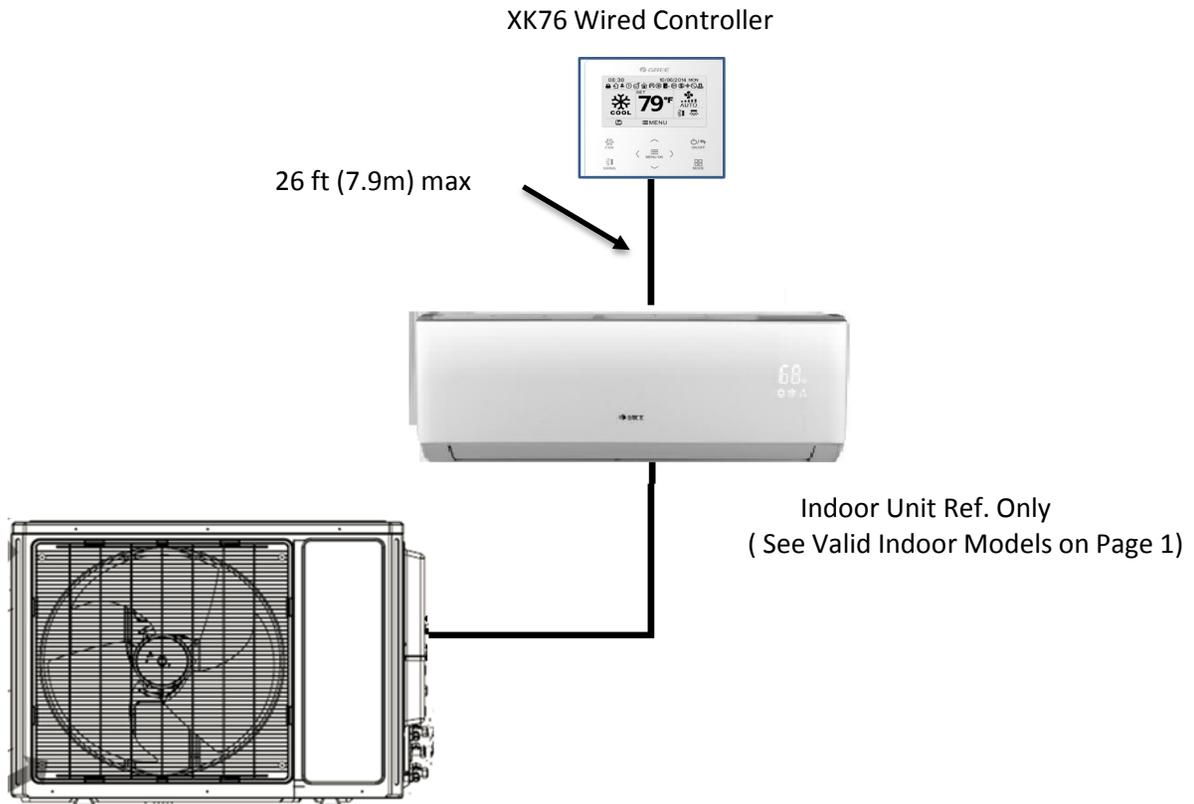

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.