

GMV

GMV-ND18TS/B-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND18TS/B-T(U)
Performance		
Rated cooling capacity	kBtu/h	18
Rated heating capacity	kBtu/h	20
Sound pressure level	dB(A)	32/35/37
Electric data		
Power supply	Voltage,Phase,Hertz	208/230,1,60
Maximum Overcurrent Protection(MOP)	A	15
Minimum Circuit Amps(MCA)	A	1
Fan		
Type×Qunity	—	Centrifugal×1
Air Flow Volume	CFM	398/417/450
Fan Motor Running Current	A	0.7
Fan Motor Power Output	W	35
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ15.9, 5/8
	Liquid(mm/inch)	Φ9.52, 3/8
Connection Method	—	Flare Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimension(H×W×D)	mm/inch	280×790×630 11×31-1/8×24-3/4
Net Weight	kg/lbs	26/57.3
Other		
Safety Certification	—	ETL

Job Name:


Schedule Reference:

Date:

Specification are subject to change without notice.

Outline and Physical Dimensions of GMV-ND18TS/B-T(U)


Unit: mm(inch)

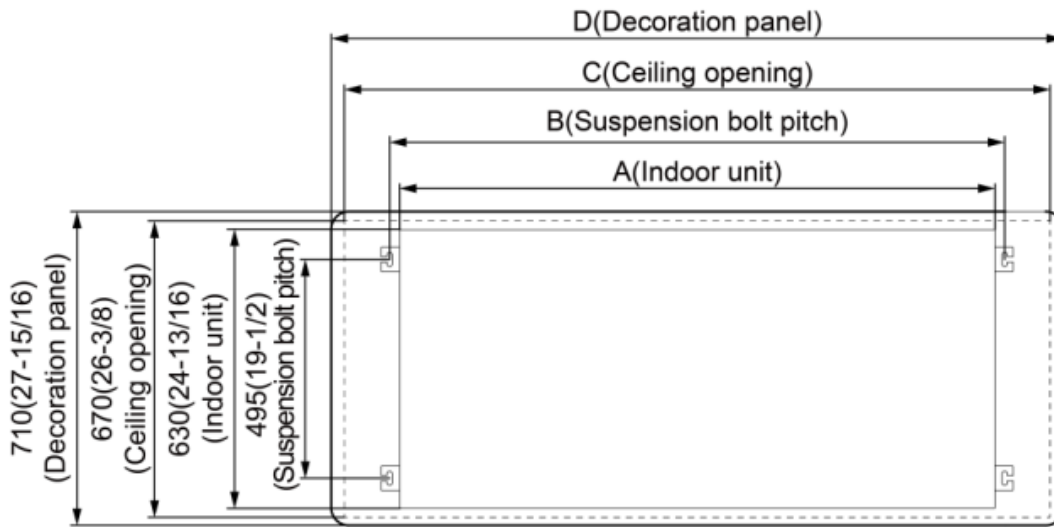

Model	Indoor unit(A)	Suspension bolt pitch(B)	Ceiling opening (C)	Decoration panel(D)
GMV-ND18TS/B-T(U)	790(31-1/8)	834(32-7/8)	990(39)	1100(43-1/4)

Installation space

Unit: mm(inch)

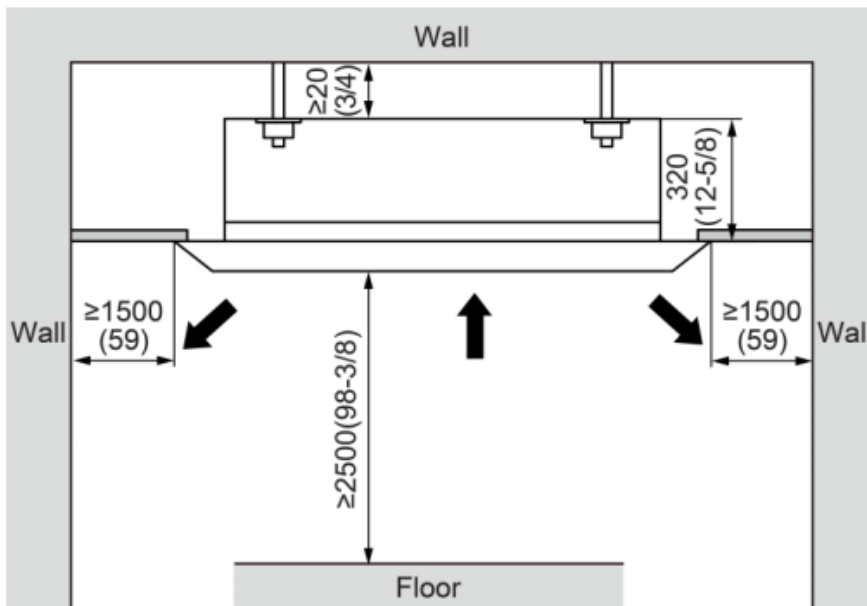

GREE ELECTRIC APPLIANCES, INC. OF ZHUHAI

Add: West Jinji Rd., Qianshan, Zhuhai, Guangdong, China, 519070

Tel: (+86-756) 8522218 Fax: (+86-756)8669426 E-mail: gree@gree.com.cn www.gree.com