

2-Way Cassette 208~230V



Job Name: _____ Date: _____

System Reference No.: _____ Engineer Signature: _____

Model: GMV-ND24TS/A-T(U)




Specifications	Unit	Parameter
Performance		GMV-ND24TS/A-T(U)
Rated Cooling Capacity	kBtu/h	24.0
Rated Heating Capacity	kBtu/h	27.0
Sound Pressure Level (H/M/L)	dB(A)	39/37/35
Electrical Data		
Power supply	Voltage, Phase, Hertz	208/230, 1, 60
Minimum Circuit Amps (MCA)	A	1
Maximum Overcurrent Protection (MOP)	A	15
Fuse	A	15
Fan		
Type x Quantity		Centrifugal x 3
Air Flow Volume (H/M/L)	CFM	650/483/448
Fan Motor Running Current	A	0.7
Fan Motor Power Input	W	91
Refrigerant Piping		
Connection Pipe	Gas (inch)	5/8
	Liquid (inch)	3/8
Connection Method		Flare Connection
Refrigerant		R410A
Cassette Dimension/Weight		
Dimensions (HxWxD)	inch	47-1/4 x 20-1/2 x 13-3/8
Net Weight	lbs	95
Panel Dimension/Weight		
Panel model		TE01
Dimensions (HxWxD)	inch	55-3/4 x 24-13/16 x 1-1/4
Net Weight	lbs	15
Other		
Safety Certification		ETL


Outline and Physical Dimensions of GMV-ND24TS/A-T(U).



Main Body

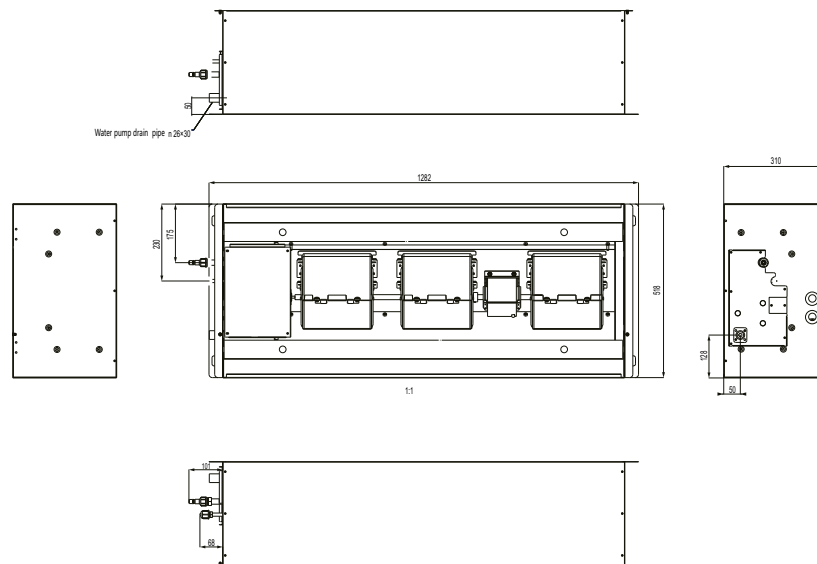

TE01 panel

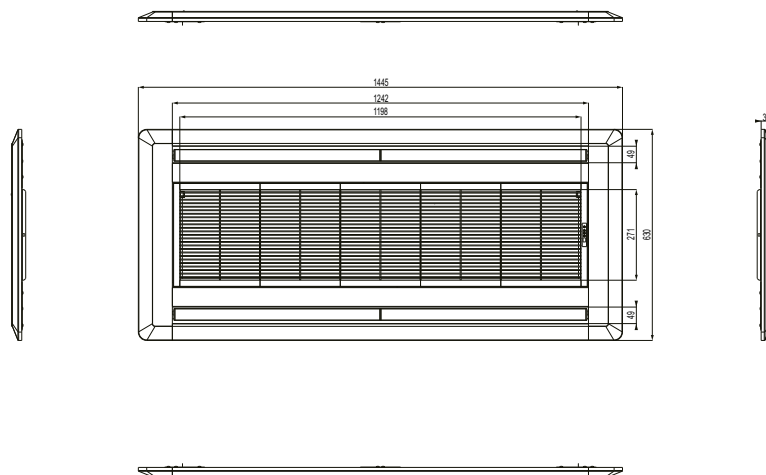

Unit:mm(in.)

