

8 Way Cassette 208~230V



Job Name: _____ Date: _____





System Reference No.: _____ Engineer Signature: _____

Model: GMV-ND07T/C-T(U)



Specifications	Unit	Parameter
Performance		GMV-ND07T/C-T(U)
Rated Cooling Capacity	kBtu/h	7.5
Rated Heating Capacity	kBtu/h	8.5
Sound Pressure Level (H/M/L)	dB(A)	34/32/30
Electrical Data		
Power supply	Voltage, Phase, Hertz	208/230, 1, 60
Minimum Circuit Amps (MCA)	A	0.8
Maximum Overcurrent Protection (MOP)	A	15
Fuse	A	15
Fan		
Type x Quantity		Centrifugal x 1
Air Flow Volume (H/M/L)	CFM	470/410/355
Fan Motor Running Current	A	0.6
Refrigerant Piping		
Connection Pipe	Gas (inch)	3/8
	Liquid (inch)	1/4
Connection Method		Flare Connection
Refrigerant		R410A
Cassette Dimension/Weight		
Dimensions (WxDxH)	inch	33-1/8 x 33-1/8 x 9-1/2
Net Weight	lbs.	64
Panel Dimension/Weight		
Panel model		TF06
Dimensions (WxDxH)	inch	37-3/8 x 37-3/8 x 2-1/2
Net Weight	lbs.	13
Other		
Safety Certification		ETL

Outline and Physical Dimensions of GMV-ND07T/C-T(U).

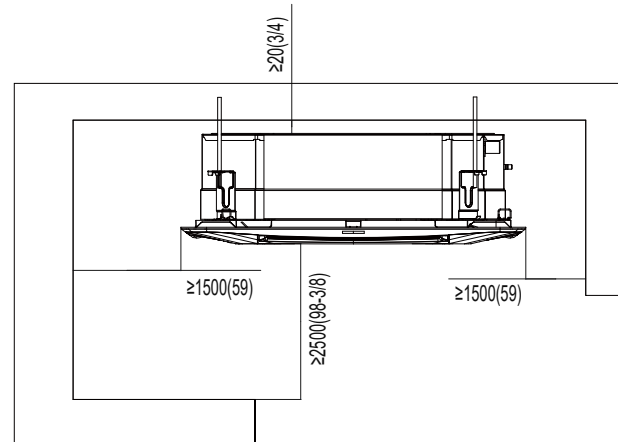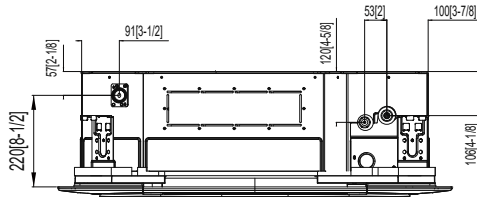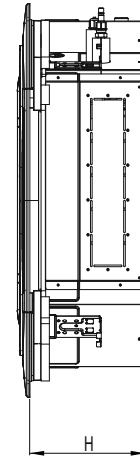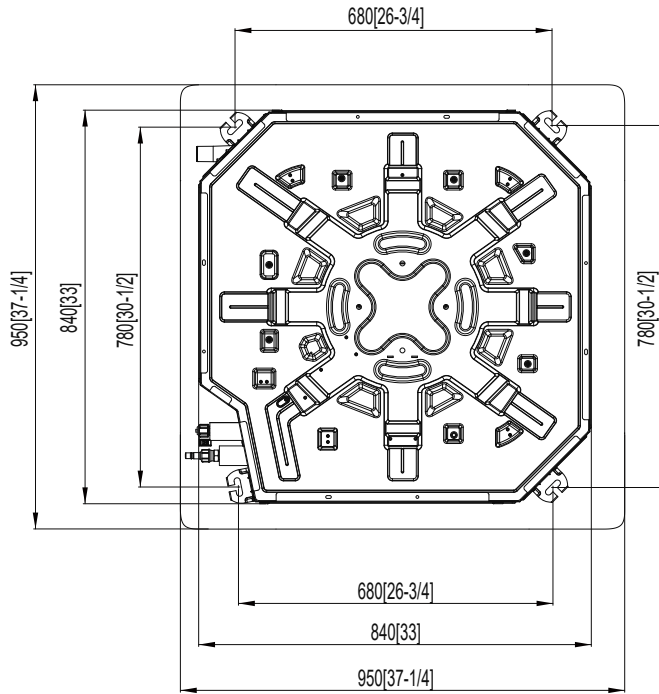

Unit:mm(in.)

