

# 8 Way Cassette 208~230V



Job Name: \_\_\_\_\_ Date: \_\_\_\_\_





System Reference No.: \_\_\_\_\_ Engineer Signature: \_\_\_\_\_

## Model: GMV-ND36T/C-T(U)



Specifications	Unit	Parameter
<b>Performance</b>		GMV-ND36T/C-T(U)
Rated Cooling Capacity	kBtu/h	36.0
Rated Heating Capacity	kBtu/h	40.0
Sound Pressure Level (H/M/L)	dB(A)	43/39/37
<b>Electrical Data</b>		
Power supply	Voltage, Phase, Hertz	208/230, 1, 60
Minimum Circuit Amps (MCA)	A	2
Maximum Overcurrent Protection (MOP)	A	15
Fuse	A	15
<b>Fan</b>		
Type x Quantity		Centrifugal x 1
Air Flow Volume (H/M/L)	CFM	1500/1200/1000
Fan Motor Running Current	A	1.0
<b>Refrigerant Piping</b>		
Connection Pipe	Gas (inch)	5/8
	Liquid (inch)	3/8
Connection Method		Flare Connection
Refrigerant		R410A
<b>Cassette Dimension/Weight</b>		
Dimensions (WxDxH)	inch	33-1/8 x 33-1/8 x 11-3/8
Net Weight	lbs.	73
<b>Panel Dimension/Weight</b>		
Panel model		TF06
Dimensions (WxDxH)	inch	37-3/8 x 37-3/8 x 2-1/2
Net Weight	lbs.	13
<b>Other</b>		
Safety Certification		ETL

# Outline and Physical Dimensions of GMV-ND36T/C-T(U).

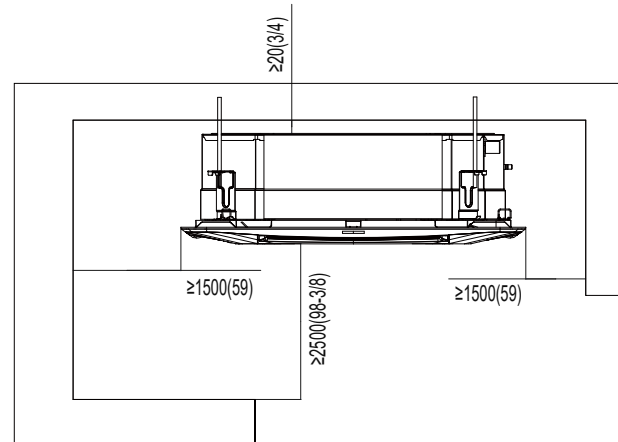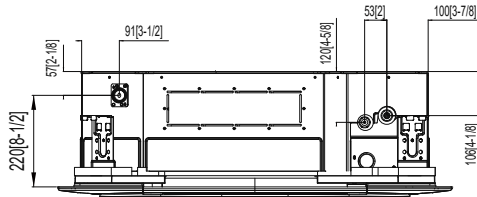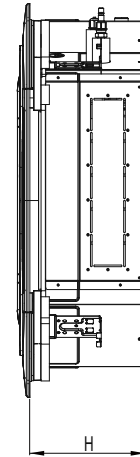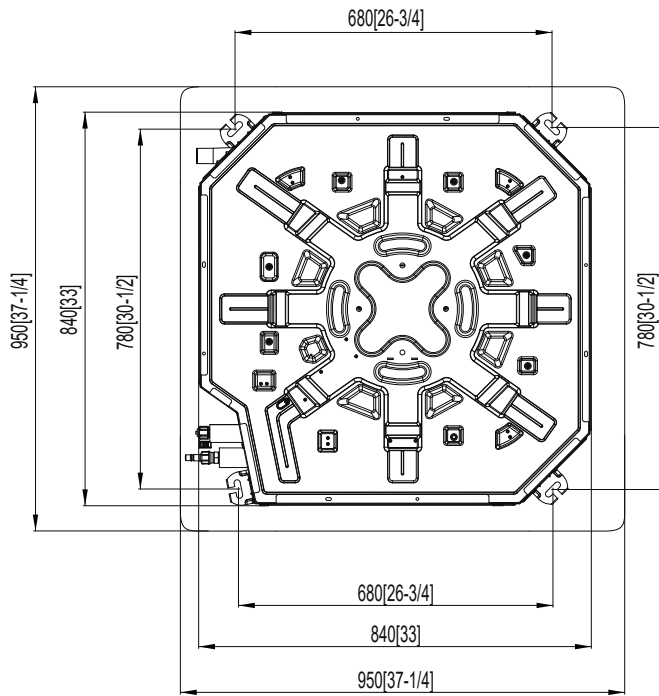

Unit:mm(in.)

