

4-Way Cassette 208~230V







Job Name: _____ Date: _____
System Reference No.: _____ Engineer Signature: _____

Model: GMV-ND09T/A-T(U)



Specifications	Unit	Parameter
Performance		GMV-ND09T/A-T(U)
Rated Cooling Capacity	kBtu/h	9.5
Rated Heating Capacity	kBtu/h	10.5
Sound Pressure Level (H/M/L)	dB(A)	37/35/32
Electrical Data		
Power supply	Voltage, Phase, Hertz	208/230, 1, 60
Minimum Circuit Amps (MCA)	A	1
Maximum Overcurrent Protection (MOP)	A	15
Fuse	A	15
Fan		
Type x Quantity		Centrifugal x 1
Air Flow Volume (H/M/L)	CFM	590/530/440
Fan Motor Running Current	A	0.5
Fan Motor Power Input	W	59
Refrigerant Piping		
Connection Pipe	High Pressure Gas (inch)	3/8
	Liquid (inch)	1/4
Connection Method		Flare Connection
Refrigerant		R410A
Cassette Dimension/Weight		
Dimensions (HxWxD)	inch	33×33×9-1/2
Net Weight	lbs	58
Panel Dimension/Weight		
Panel model		TC01
Dimensions (HxWxD)	inch	37-3/8×37-3/8×2-1/2
Net Weight	lbs	15
Other		
Safety Certification		ETL

Outline and Physical Dimensions of GMV-ND09T/A-T(U).

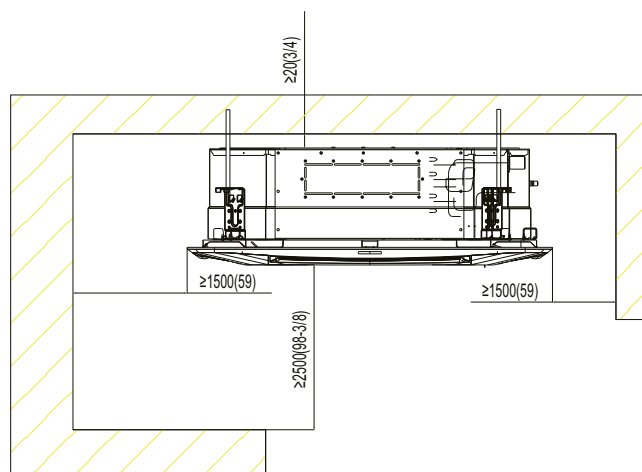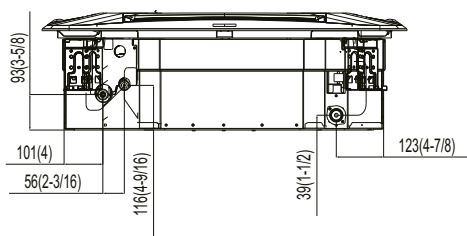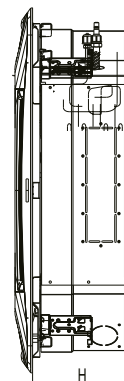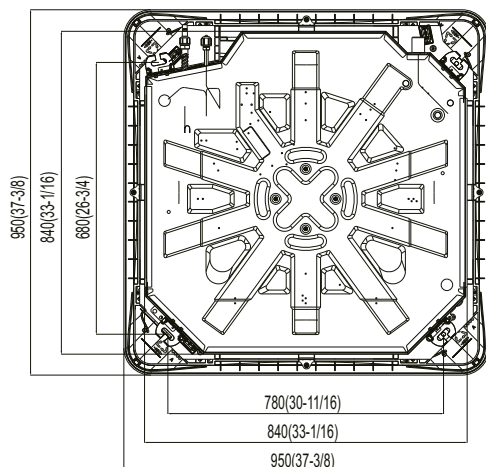

Unit:mm(in.)

