


Wired Remote Controller XK79

This wired remote controller is optional for VRF indoor units (duct, cassette, wall mounted, floor ceiling, air handler, console), which is intended for hotel with key card control function.

Model: XK79




| No. | Buttons | Instructions |
|-------|-------------|---|
| 1 | SWING/ENTER | (1) Set vertical air swing. (2) Select and cancel functions. |
| 2 | TIMER | Timer setting. |
| 3 | ▲ | (1) Set operating temperature of indoor unit. (2) Set Timer. |
| 7 | ▼ | (3) Switch Quiet mode, Air grade, Clean grade, set upper and lower temperature limit under Save mode. (4) Set and inquiry parameter. |
| 4 | MODE | Switch Auto, Cooling, Dry, Fan, Heating, Floor Heating, 3D Heating and Space Heating modes for indoor unit. (NOTE: The Floor Heating, 3D Heating and Space Heating function icon will show up when the unit has those functions). |
| 5 | FUNCTION | Switch among Air, Quiet, Light, Health, Absence, Save, Clean, and X-fan functions. |
| 6 | FAN | Switch among auto, low speed, low-medium speed, medium speed, medium-high speed, high speed and turbo status. |
| 8 | ON/OFF | Indoor unit On/Off. |
| 3 + 7 | ▲+▼ | Simultaneously press "▲" and "▼" for 5s to enter or cancel the Child Lock function. |

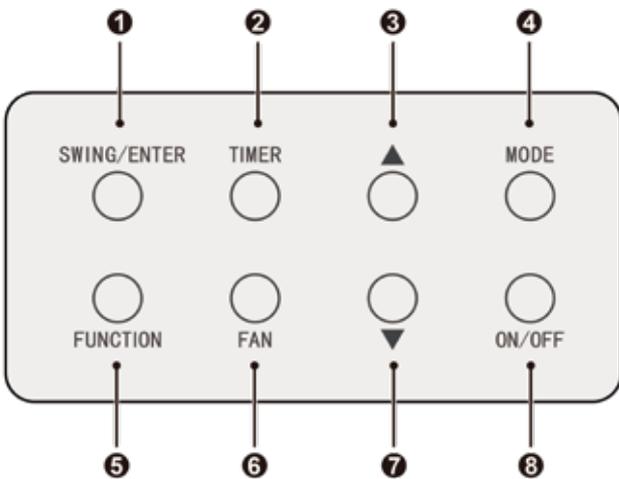


| | | | |
|-----------------------|--|-------|--|
| Job Name: | | Date: | |
| System Reference No.: | | | |
| Engineer Signature: | | | |

Outline and Physical Dimensions of XK79.

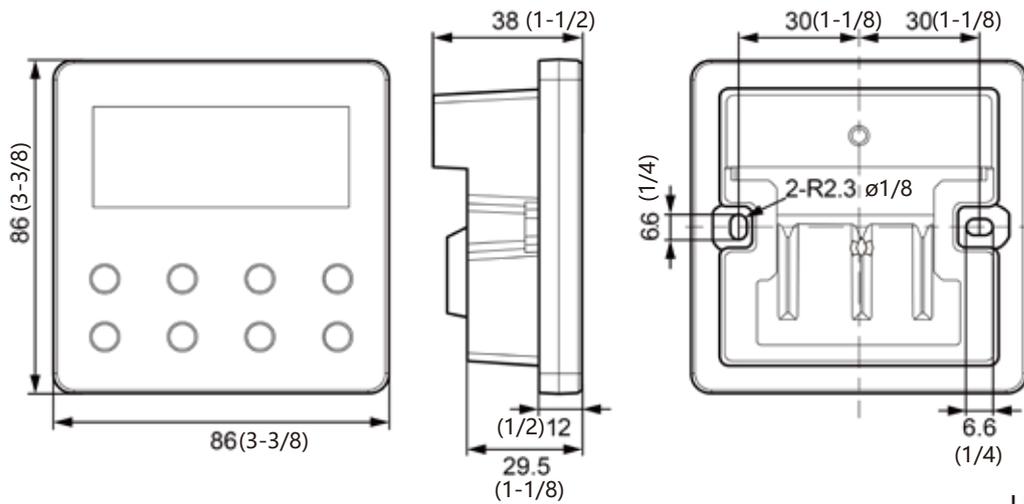

Unit: mm(in.)

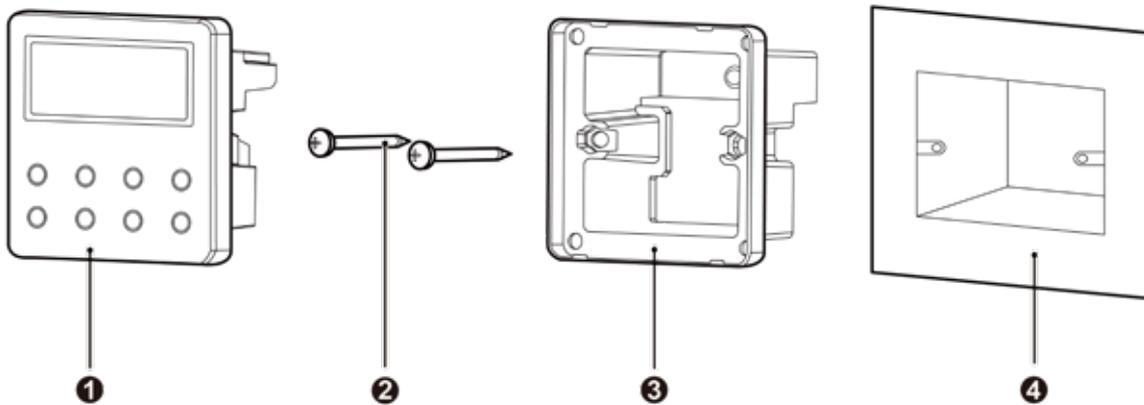

| No. | 1 | 2 | 3 | 4 |
|------|---------------------------|-------------|-------------------------------|--|
| Name | Panel of wired controller | Screw M4×25 | Soleplate of wired controller | Junction box mounted in the wall space |
| QTY | 1 | 2 | 1 | Parts supplied by users |