


GMV

ME30-24/D1(BM)

C&H protocol gateway ME30-24/D1(BM) for multi VRF unit can realize data exchange between air conditioner and BMS system and provide building interfaces for standard Modbus RTU, Modbus TCP and BACnet/IP. This gateway is applicable to the C&H multi VRF unit that uses CAN protocol.



Diagram of Interface Function

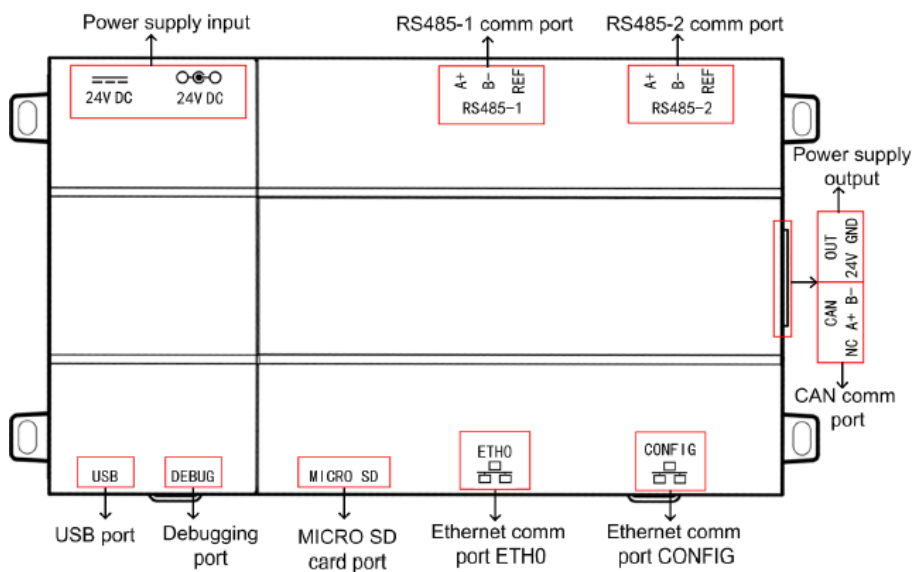


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Outline and Physical Dimensions of ME20-24/D1(T)

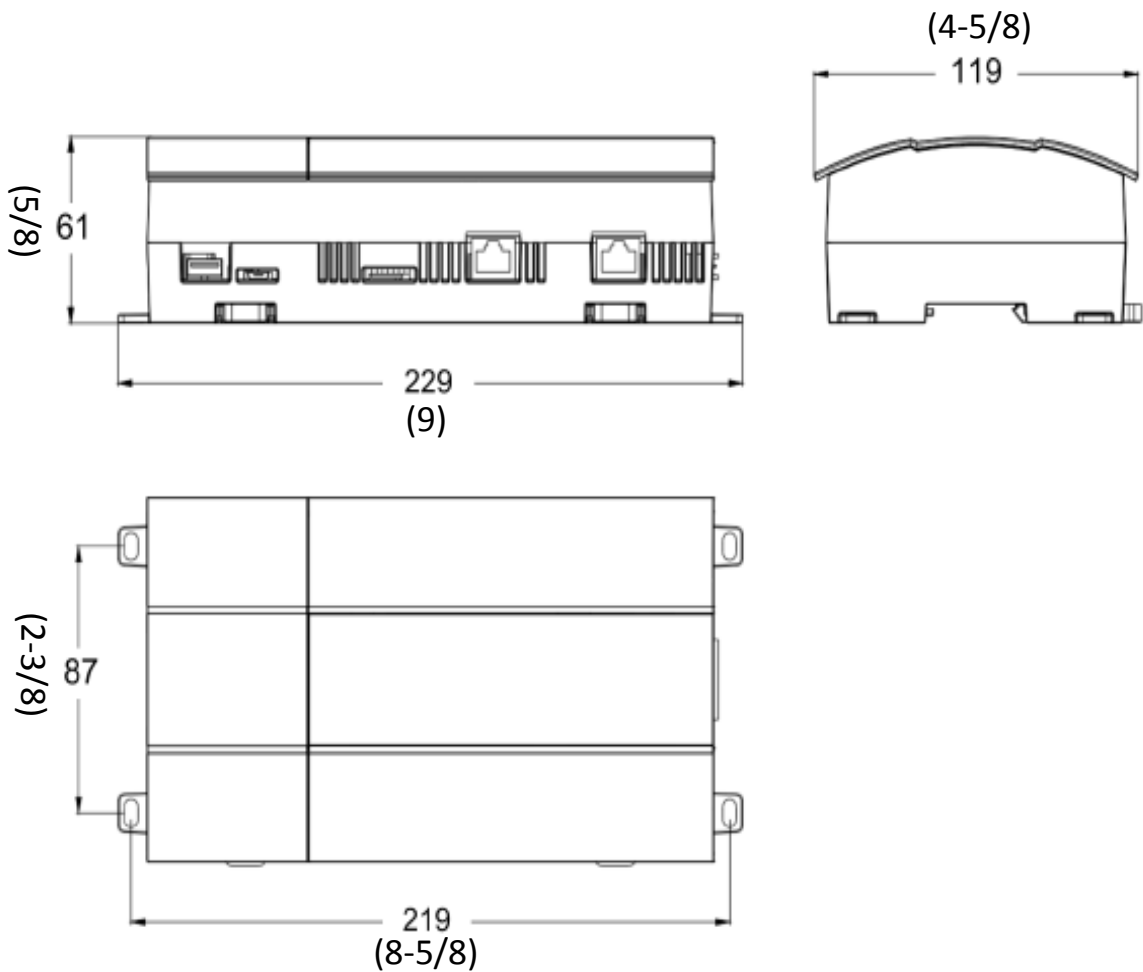

Unit outline dimension: mm(inch)