

Compact 4-Way Cassette 208~230V



Job Name: _____ Date: _____





System Reference No.: _____ Engineer Signature: _____

Model: GMV-ND12T/B-T(U)



Specifications	Unit	Parameter
Performance		GMV-ND12T/B-T(U)
Rated Cooling Capacity	kBtu/h	12.0
Rated Heating Capacity	kBtu/h	13.5
Sound Pressure Level (H/M/L)	dB(A)	41/39/35
Electrical Data		
Power supply	Voltage, Phase, Hertz	208/230, 1, 60
Minimum Circuit Amps (MCA)	A	2
Maximum Overcurrent Protection (MOP)	A	15
Fuse	A	15
Fan		
Type x Quantity		Centrifugal x 1
Air Flow Volume (H/M/L)	CFM	355/295/235
Fan Motor Running Current	A	0.4
Fan Motor Power Input	W	35
Refrigerant Piping		
Connection Pipe	Gas (inch)	1/2
	Liquid (inch)	1/4
Connection Method		Flare Connection
Refrigerant		R410A
Cassette Dimension/Weight		
Dimensions (HxWxD)	inch	9-1/2 x 23-1/2 x 23-1/2
Net Weight	lbs	45
Panel Dimension/Weight		
Panel model		TC03
Dimensions (HxWxD)	inch	2 x 26-3/8 x 26-3/8
Net Weight	lbs	8
Other		
Safety Certification		ETL

Outline and Physical Dimensions of GMV-ND12T/B-T(U).

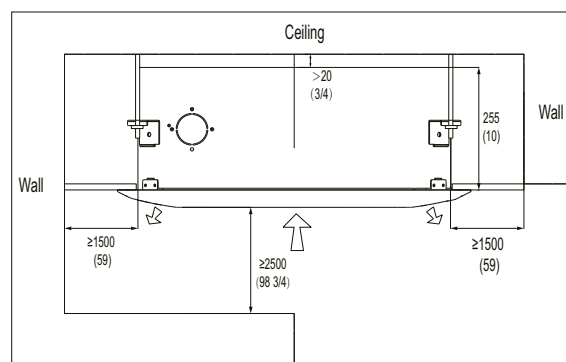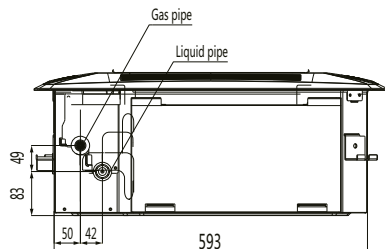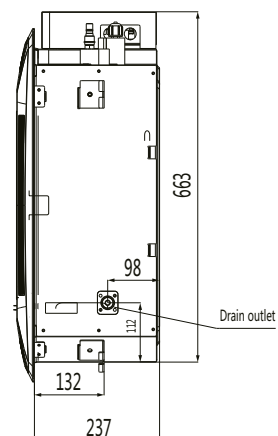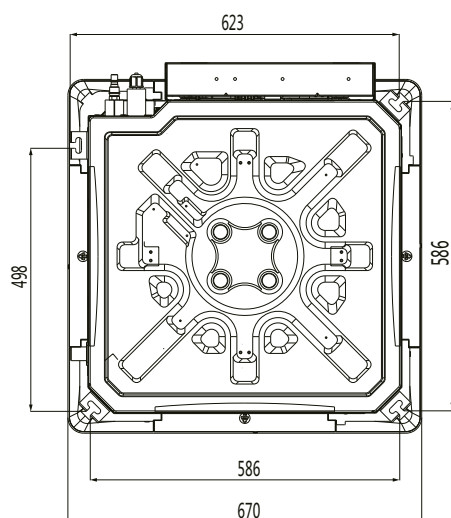

Unit:mm(in.)

