

### 208~230V High Static Duct Type


## Model:GMV-ND30PHS/NhD-T(U)



| Specifications                        | Unit                   | Parameter               |
|---------------------------------------|------------------------|-------------------------|
| Model                                 | -                      | GMV-ND30PHS/NhD-T(U)    |
| <b>Performance</b>                    |                        |                         |
| Rated Cooling Capacity                | Btu/h                  | 30000                   |
| Rated Heating Capacity                | Btu/h                  | 34000                   |
| Sound Pressure Level                  | dB(A)                  | 44/40/37                |
| <b>Electrical Data</b>                |                        |                         |
| Power Supply                          | Voltage/Phase/ Hertz   | 208/230V, 1Ph, ~60      |
| Maximum Overcurrent Protection (MOP)  | A                      | 15                      |
| Minimum Circuit Amps (MCA)            | A                      | 2.7                     |
| <b>Fan</b>                            |                        |                         |
| Type x Quantity                       | -                      | Centrifugal X 3         |
| Air Flow Volume                       | CFM                    | 1175/940/825            |
| ESP                                   | In W.c.                | 0.36/0~ 0.8             |
| <b>Refrigerant Piping</b>             |                        |                         |
| Connection Pipe                       | Gas (In) / Liquid (In) | 5/8" / 3/8"             |
|                                       | Drain (In)             | 1"                      |
| Connection Method                     | -                      | Flared                  |
| Refrigerant                           | -                      | R32                     |
| <b>Dimension/Weight</b>               |                        |                         |
| Dimension (WxDxH)                     | inch                   | 55-1/8×27-9/16×11-13/16 |
| Net Weight                            | lbs                    | 128                     |
| <b>Other</b>                          |                        |                         |
| Safety Certification                  | -                      | ETL                     |
| A2L Compliant Refrigerant Leak Sensor | -                      | Factory Installed       |

|                       |  |       |  |
|-----------------------|--|-------|--|
| Job Name:             |  | Date: |  |
| System Reference No.: |  |       |  |
| Engineer Signature:   |  |       |  |

### Outline and Physical Dimensions of GMV-ND30PSH/NhD-T(U).

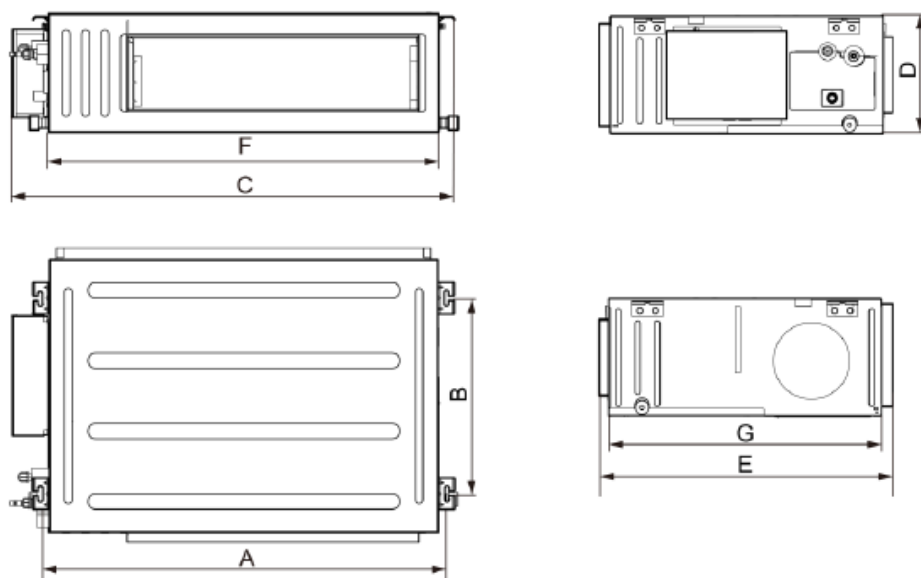

The following table lists the detailed dimensions.

Unit: mm(inch)

| Model                | A               | B              | C             | D              | E              | F             |
|----------------------|-----------------|----------------|---------------|----------------|----------------|---------------|
| GMV-ND30PHS/NhD-T(U) |                 |                |               |                |                |               |
| GMV-ND36PHS/NhD-T(U) |                 |                |               |                |                |               |
| GMV-ND42PHS/NhD-T(U) | 1440 (56 11/16) | 500 (19 11/16) | 1540 (62 5/8) | 300 (11 13/16) | 754 (29 11/16) | 1400 (55 1/8) |
| GMV-ND48PHS/NhD-T(U) |                 |                |               |                |                |               |
| GMV-ND54PHS/NhD-T(U) |                 |                |               |                |                |               |



Unit:mm(in.)