

208~230V High Static Duct Type

Model:GMV-ND54PHS/NhD-T(U)




XE7C-23/H

Specifications	Unit	Parameter
Model	-	GMV-ND54PHS/NhD-T(U)
Performance		
Rated Cooling Capacity	Btu/h	54000
Rated Heating Capacity	Btu/h	60000
Sound Pressure Level	dB(A)	46/44/41
Electrical Data		
Power Supply	Voltage/Phase/ Hertz	208/230V, 1Ph, ~60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	3.7
Fan		
Type x Quantity	-	Centrifugal X 3
Air Flow Volume	CFM	1470/1175/1030
ESP	In W.c.	0.36/0~ 0.8
Refrigerant Piping		
Connection Pipe	Gas (In) / Liquid (In)	5/8" / 3/8"
	Drain (In)	1"
Connection Method	-	Flared
Refrigerant	-	R32
Dimension/Weight		
Dimension (WxDxH)	inch	55-1/8×27-9/16×11-13/16
Net Weight	lbs	128
Other		
Safety Certification	-	ETL
A2L Compliant Refrigerant Leak Sensor	-	Factory Installed

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND54PSH/NhD-T(U).

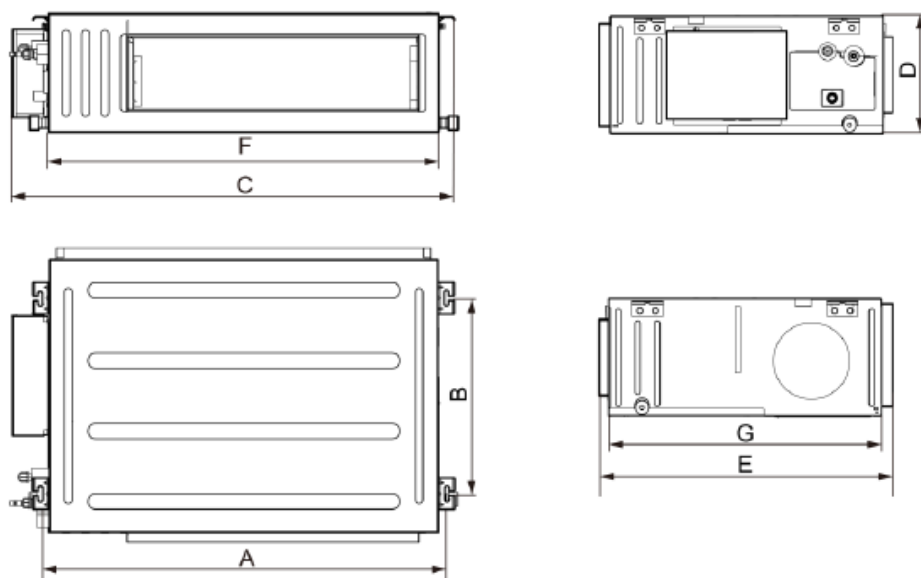

The following table lists the detailed dimensions.

Unit: mm(inch)

Model	A	B	C	D	E	F
GMV-ND30PHS/NhD-T(U)						
GMV-ND36PHS/NhD-T(U)						
GMV-ND42PHS/NhD-T(U)	1440 (56 11/16)	500 (19 11/16)	1540 (62 5/8)	300 (11 13/16)	754 (29 11/16)	1400 (55 1/8)
GMV-ND48PHS/NhD-T(U)						
GMV-ND54PHS/NhD-T(U)						



Unit:mm(in.)