

### 208~230V Multi-Position Air Handler

## Model:GMV-ND30A/NhB-T(U)



| Specifications                        | Unit                   | Parameter            |
|---------------------------------------|------------------------|----------------------|
| Model                                 | -                      | GMV-ND30A/NhB-T(U)   |
| <b>Performance</b>                    |                        |                      |
| Rated Cooling Capacity                | Btu/h                  | 30000                |
| Rated Heating Capacity                | Btu/h                  | 34000                |
| Sound Pressure Level                  | dB(A)                  | 42/40/38             |
| <b>Electrical Data</b>                |                        |                      |
| Power Supply                          | Voltage/Phase/ Hertz   | 208/230V, 1Ph, ~60   |
| Maximum Overcurrent Protection (MOP)  | A                      | 15                   |
| Minimum Circuit Amps (MCA)            | A                      | 3                    |
| <b>Fan</b>                            |                        |                      |
| Type x Quantity                       | -                      | Centrifugal X 1      |
| Air Flow Volume                       | CFM                    | 910/820/710          |
| ESP                                   | In W.c.                | 0.2/0~1.0            |
| <b>Refrigerant Piping</b>             |                        |                      |
| Connection Pipe                       | Gas (In) / Liquid (In) | 5/8" / 3/8"          |
|                                       | Drain (In)             | 3/4"                 |
| Connection Method                     | -                      | Flared               |
| Refrigerant                           | -                      | R32                  |
| <b>Dimension/Weight</b>               |                        |                      |
| Dimension (WxDxH)                     | inch                   | 21-1/4×18-1/8×43-1/2 |
| Net Weight                            | lbs                    | 130                  |
| <b>Other</b>                          |                        |                      |
| Safety Certification                  | -                      | ETL                  |
| A2L Compliant Refrigerant Leak Sensor | -                      | Factory Installed    |

|                       |  |       |  |
|-----------------------|--|-------|--|
| Job Name:             |  | Date: |  |
| System Reference No.: |  |       |  |
| Engineer Signature:   |  |       |  |

### Outline and Physical Dimensions of GMV-ND30A-NhB-T(U).

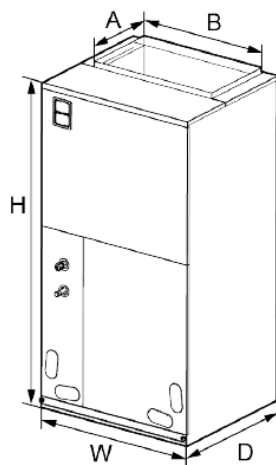


Fig.4.1.1

Unit: mm (inch)

| Model                                                                                | Dimension         |                  |                    |                 |                 |
|--------------------------------------------------------------------------------------|-------------------|------------------|--------------------|-----------------|-----------------|
|                                                                                      | W                 | D                | H                  | A               | B               |
| GMV-ND30A/NhB-T(U)<br>GMV-ND24A/NhB-T(U)<br>GMV-ND18A/NhB-T(U)<br>GMV-ND12A/NhB-T(U) | 540<br>(21-1/4)   | 460<br>(18-1/8 ) | 1105<br>(43-1/2)   | 295<br>(11-5/8) | 426<br>(16-3/4) |
| GMV-ND42A/NhB-T(U)<br>GMV-ND36A/NhB-T(U)                                             | 540<br>(21-1/4)   | 540<br>(21-1/4)  | 1224<br>(48-1/4)   | 295<br>(11-5/8) | 508<br>(20)     |
| GMV-ND60A/NhB-T(U)<br>GMV-ND54A/NhB-T(U)<br>GMV-ND48A/NhB-T(U)                       | 630<br>(24-13/16) | 540<br>(21-1/4)  | 1320<br>(51-15/16) | 295<br>(11-5/8) | 508<br>(20)     |



Unit:mm(in.)