

### 208~230V Multi-Position Air Handler

## Model:GMV-ND48A/NhB-T(U)



| Specifications                        | Unit                     | Parameter                |
|---------------------------------------|--------------------------|--------------------------|
| Model                                 | -                        | GMV-ND48A/NhB-T(U)       |
| <b>Performance</b>                    |                          |                          |
| Rated Cooling Capacity                | Btu/h                    | 48000                    |
| Rated Heating Capacity                | Btu/h                    | 54000                    |
| Sound Pressure Level                  | dB(A)                    | 51/50/49                 |
| <b>Electrical Data</b>                |                          |                          |
| Power Supply                          | Voltage/Phase/ Hertz     | 208/230V, 1Ph, ~60       |
| Maximum Overcurrent Protection (MOP)  | A                        | 15                       |
| Minimum Circuit Amps (MCA)            | A                        | 7.7                      |
| <b>Fan</b>                            |                          |                          |
| Type x Quantity                       | -                        | Centrifugal X 1          |
| Air Flow Volume                       | CFM                      | 1800/1600/1500           |
| ESP                                   | In W.c.                  | 0.2/0~1.0                |
| <b>Refrigerant Piping</b>             |                          |                          |
| Connection Pipe                       | Gas (Inch) / Liquid (In) | 5/8" / 3/8"              |
|                                       | Drain (In)               | 3/4"                     |
| Connection Method                     | -                        | Flared                   |
| Refrigerant                           | -                        | R32                      |
| <b>Dimension/Weight</b>               |                          |                          |
| Dimension (WxDxH)                     | inch                     | 24-13/16x21-1/4x51-15/16 |
| Net Weight                            | lbs                      | 194                      |
| <b>Other</b>                          |                          |                          |
| Safety Certification                  | -                        | ETL                      |
| A2L Compliant Refrigerant Leak Sensor | -                        | Factory Installed        |

|                       |  |       |  |
|-----------------------|--|-------|--|
| Job Name:             |  | Date: |  |
| System Reference No.: |  |       |  |
| Engineer Signature:   |  |       |  |

### Outline and Physical Dimensions of GMV-ND48A-NhB-T(U).

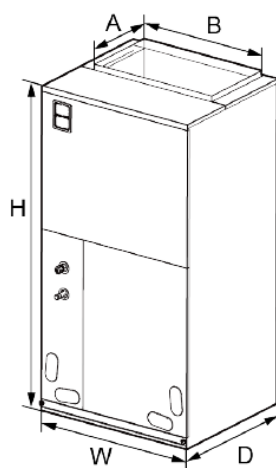


Fig.4.1.1

Unit: mm (inch)

| Model                                                                                | Dimension         |                  |                    |                 |                 |
|--------------------------------------------------------------------------------------|-------------------|------------------|--------------------|-----------------|-----------------|
|                                                                                      | W                 | D                | H                  | A               | B               |
| GMV-ND30A/NhB-T(U)<br>GMV-ND24A/NhB-T(U)<br>GMV-ND18A/NhB-T(U)<br>GMV-ND12A/NhB-T(U) | 540<br>(21-1/4)   | 460<br>(18-1/8 ) | 1105<br>(43-1/2)   | 295<br>(11-5/8) | 426<br>(16-3/4) |
| GMV-ND42A/NhB-T(U)<br>GMV-ND36A/NhB-T(U)                                             | 540<br>(21-1/4)   | 540<br>(21-1/4)  | 1224<br>(48-1/4)   | 295<br>(11-5/8) | 508<br>(20)     |
| GMV-ND60A/NhB-T(U)<br>GMV-ND54A/NhB-T(U)<br>GMV-ND48A/NhB-T(U)                       | 630<br>(24-13/16) | 540<br>(21-1/4)  | 1320<br>(51-15/16) | 295<br>(11-5/8) | 508<br>(20)     |



Unit:mm(in.)