

208~230V Multi-Position Air Handler

Model:GMV-ND60A/NhB-T(U)



Specifications	Unit	Parameter
Model	-	GMV-ND60A/NhB-T(U)
Performance		
Rated Cooling Capacity	Btu/h	60000
Rated Heating Capacity	Btu/h	66000
Sound Pressure Level	dB(A)	51/50/49
Electrical Data		
Power Supply	Voltage/Phase/ Hertz	208/230V, 1Ph, ~60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	7.7
Fan		
Type x Quantity	-	Centrifugal X 1
Air Flow Volume	CFM	1820/1650/1530
ESP	In W.c.	0.2/0~1.0
Refrigerant Piping		
Connection Pipe	Gas (In) / Liquid (In)	5/8" / 3/8"
	Drain (In)	3/4"
Connection Method	-	Flared
Refrigerant	-	R32
Dimension/Weight		
Dimension (WxDxH)	inch	24-13/16x21-1/4x51-15/16
Net Weight	lbs	194
Other		
Safety Certification	-	ETL
A2L Compliant Refrigerant Leak Sensor	-	Factory Installed

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND60A-NhB-T(U).

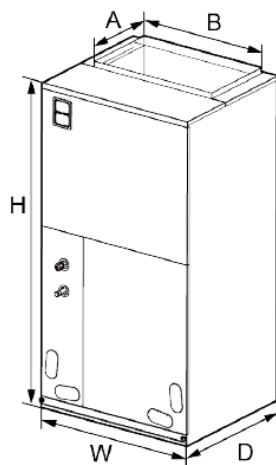


Fig.4.1.1

Unit: mm (inch)

Model	Dimension				
	W	D	H	A	B
GMV-ND30A/NhB-T(U) GMV-ND24A/NhB-T(U) GMV-ND18A/NhB-T(U) GMV-ND12A/NhB-T(U)	540 (21-1/4)	460 (18-1/8)	1105 (43-1/2)	295 (11-5/8)	426 (16-3/4)
GMV-ND42A/NhB-T(U) GMV-ND36A/NhB-T(U)	540 (21-1/4)	540 (21-1/4)	1224 (48-1/4)	295 (11-5/8)	508 (20)
GMV-ND60A/NhB-T(U) GMV-ND54A/NhB-T(U) GMV-ND48A/NhB-T(U)	630 (24-13/16)	540 (21-1/4)	1320 (51-15/16)	295 (11-5/8)	508 (20)



Unit:mm(in.)