

208~230V One Way Cassette

Model:GMV-ND07TD/NhA-T(U)

Standard Remote



YAP1F




Specifications	Unit	Parameter
Model	-	GMV-ND07TD/NhA-T(U)
Performance		
Rated Cooling Capacity	Btu/h	7,500
Rated Heating Capacity	Btu/h	8,500
Sound Pressure Level	dB(A)	36 / 33 / 28
Electrical Data		
Power Supply	Voltage/Phase/ Hertz	208/230V, 1Ph, ~60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	.3
Fan		
Type x Quantity	-	Centrifugal X 1
Air Flow Volume	CFM	353 / 294 / 265
ESP	In W.c.	-
Refrigerant Piping		
Connection Pipe	Gas (In) / Liquid (In)	3/8" / 1/4"
	Drain (In)	1"
Connection Method	-	Flared
Refrigerant	-	R32
Dimension/Weight		
Dimension (WxDxH)	inch	38-7/8 x 15-3/16 x 7
Net Weight	lbs	42
Other		
Safety Certification	-	ETL
A2L Compliant Refrigerant Leak Sensor	-	Factory Installed
Panel Grille	-	TD01


Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND07TD/NhA-T(U)

Unit: mm (inch)

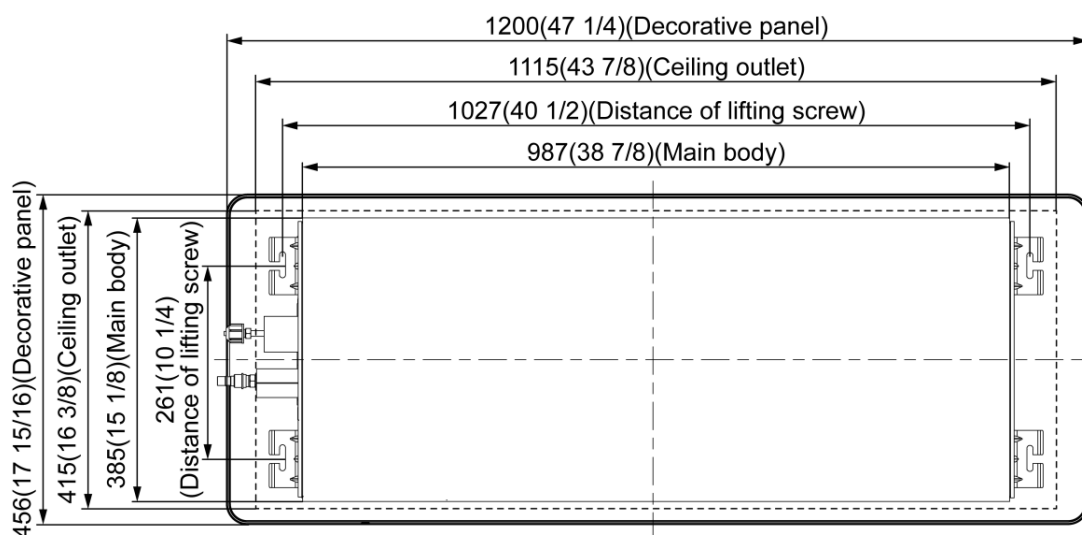

Unit: mm (inch)

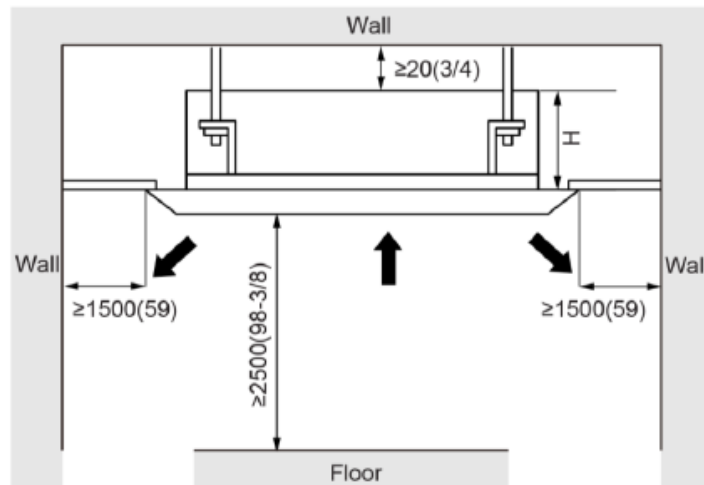

Unit: mm (inch)

Model	H
GMV-ND07TD/NhA-T(U)	207(8-1/8)
GMV-ND09TD/NhA-T(U)	
GMV-ND12TD/NhA-T(U)	