


208~230V Ceiling Cassette

Model:GMV-ND48T/NhD-T(U)

Standard Remote



YAP1F



Specifications	Unit	Parameter
Model	-	GMV-ND48T/NhD-T(U)
Performance		
Rated Cooling Capacity	Btu/h	48,000
Rated Heating Capacity	Btu/h	54,000
Sound Pressure Level	dB(A)	45 / 40 / 35
Electrical Data		
Power Supply	Voltage/Phase/ Hertz	208/230V, 1Ph, ~60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1.3
Fan		
Type x Quantity	-	Centrifugal X 1
Air Flow Volume	CFM	1060 / 853 / 677
ESP	In W.c.	-
Refrigerant Piping		
Connection Pipe	Gas (In) / Liquid (In)	5/8" / 3/8"
	Drain(In)	1"
Connection Method	-	Flared
Refrigerant	-	R32
Dimension/Weight		
Dimension (WxDxH)	inch	33-1/16 x 11-1/16 x 9-7/16
Net Weight	lbs	56
Other		
Safety Certification	-	ETL
A2L Compliant Refrigerant Leak Sensor	-	Factory Installed
Panel Grille	-	TF06


Job Name:

Date:

System Reference No.:

Engineer Signature:

Outline and Physical Dimensions of GMV-ND48T/NhD-T(U).

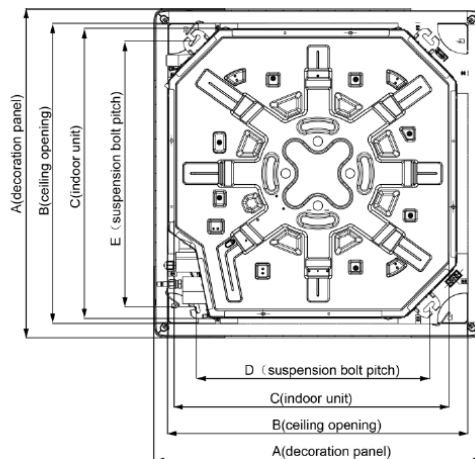


The following table lists the detailed dimensions.

Unit: mm(inch)

Model	A	B	C	D	E
GMV-ND07T/NhD-T(U)	950(37-3/8)	890(35)	840(33-1/8)	680(26-3/4)	780(30-3/4)
GMV-ND09T/NhD-T(U)					
GMV-ND12T/NhD-T(U)					
GMV-ND15T/NhD-T(U)					
GMV-ND18T/NhD-T(U)					
GMV-ND24T/NhD-T(U)					
GMV-ND30T/NhD-T(U)					
GMV-ND36T/NhD-T(U)					
GMV-ND42T/NhD-T(U)					
GMV-ND48T/NhD-T(U)					

Unit: mm (inch)

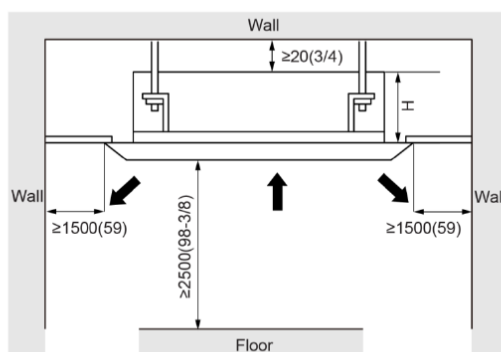

Unit: mm (inch)

Model	H
GMV-ND07T/NhD-T(U)	275(10-3/4)
GMV-ND09T/NhD-T(U)	
GMV-ND12T/NhD-T(U)	
GMV-ND15T/NhD-T(U)	
GMV-ND18T/NhD-T(U)	
GMV-ND24T/NhD-T(U)	325(12-3/4)
GMV-ND30T/NhD-T(U)	
GMV-ND36T/NhD-T(U)	
GMV-ND42T/NhD-T(U)	
GMV-ND48T/NhD-T(U)	

Unit:mm(in.)

