

208~230 Wall Mount

Model:GMV-ND24G/NhA1C-T(U)

Standard Remote



YAP1F




Specifications	Unit	Parameter
Model	-	GMV-ND24G/NhA1C-T(U)
Performance		
Rated Cooling Capacity	Btu/h	24000
Rated Heating Capacity	Btu/h	27000
Sound Pressure Level	dB(A)	44/42/38
Electrical Data		
Power Supply	Voltage/Phase/ Hertz	208/230V, 1Ph, ~60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1.1
Fan		
Type x Quantity	-	Crossflow X 1
Air Flow Volume	CFM	530
ESP	InW.c.	-
Refrigerant Piping		
Connection Pipe	Gas (In) / Liquid (In)	1/2" / 1/4"
	Drain (In)	13/16"
Connection Method	-	Flared
Refrigerant	-	R32
Dimension/Weight		
Dimension (WxDxH)	inch	43-15/16×9-3/4×13-1/8
Net Weight	lbs	34
Other		
Safety Certification	-	ETL
A2L Compliant Refrigerant Leak Sensor	-	Factory Installed

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND24G/NhA1C-T(U)

Unit: mm (inch)

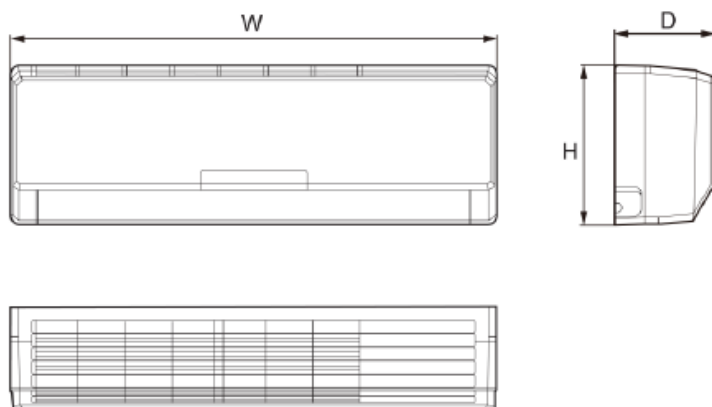

Below are dimensions of W, H, D for different models:

Unit: mm(inch)

Model	W	H	D
GMV-ND18G/NhA1C-T(U)	1116(43-15/16)	333 (13-1/8)	248 (9-3/4)
GMV-ND24G/NhA1C-T(U)			



Unit:mm(in.)