

# Medium ESP Fan Coil 208~230V



Job Name: \_\_\_\_\_ Date: \_\_\_\_\_


System Reference No.: \_\_\_\_\_ Engineer Signature: \_\_\_\_\_

## Model: GMV-ND30PLS/C-T(U)



Specifications	Unit	Parameter
<b>Performance</b>		GMV-ND30PLS/C-T(U)
Rated Cooling Capacity	kBtu/h	30
Rated Heating Capacity	kBtu/h	34
Sound Pressure Level (H/M/L)	dB(A)	40/36/32
<b>Electrical Data</b>		
Power supply	Voltage, Phase, Hertz	208/230, 1, 60
Minimum Circuit Amps (MCA)	A	3
Maximum Overcurrent Protection (MOP)	A	15
<b>Fan</b>		
Type x Quantity		Centrifugal x 3
Air Flow Volume (H/M/L)	CFM	880/735/530
ESP	in.W.G.	0~0.32
Fan Motor Running Current	A	2.4
Fan Motor Power Input	W	150
<b>Refrigerant Piping</b>		
Connection Pipe	Gas (inch)	5/8
	Liquid (inch)	3/8
Connection Method		Flare Connection
Refrigerant		R410A
<b>Dimension/Weight</b>		
Dimensions (HxWxD)	inch	52-3/4 x 25-13/16 x 10-1/4
Net Weight	lbs	45.5
<b>Other</b>		
Safety Certification		ETL

# Outline and Physical Dimensions of GMV-ND30PLS/C-T(U).

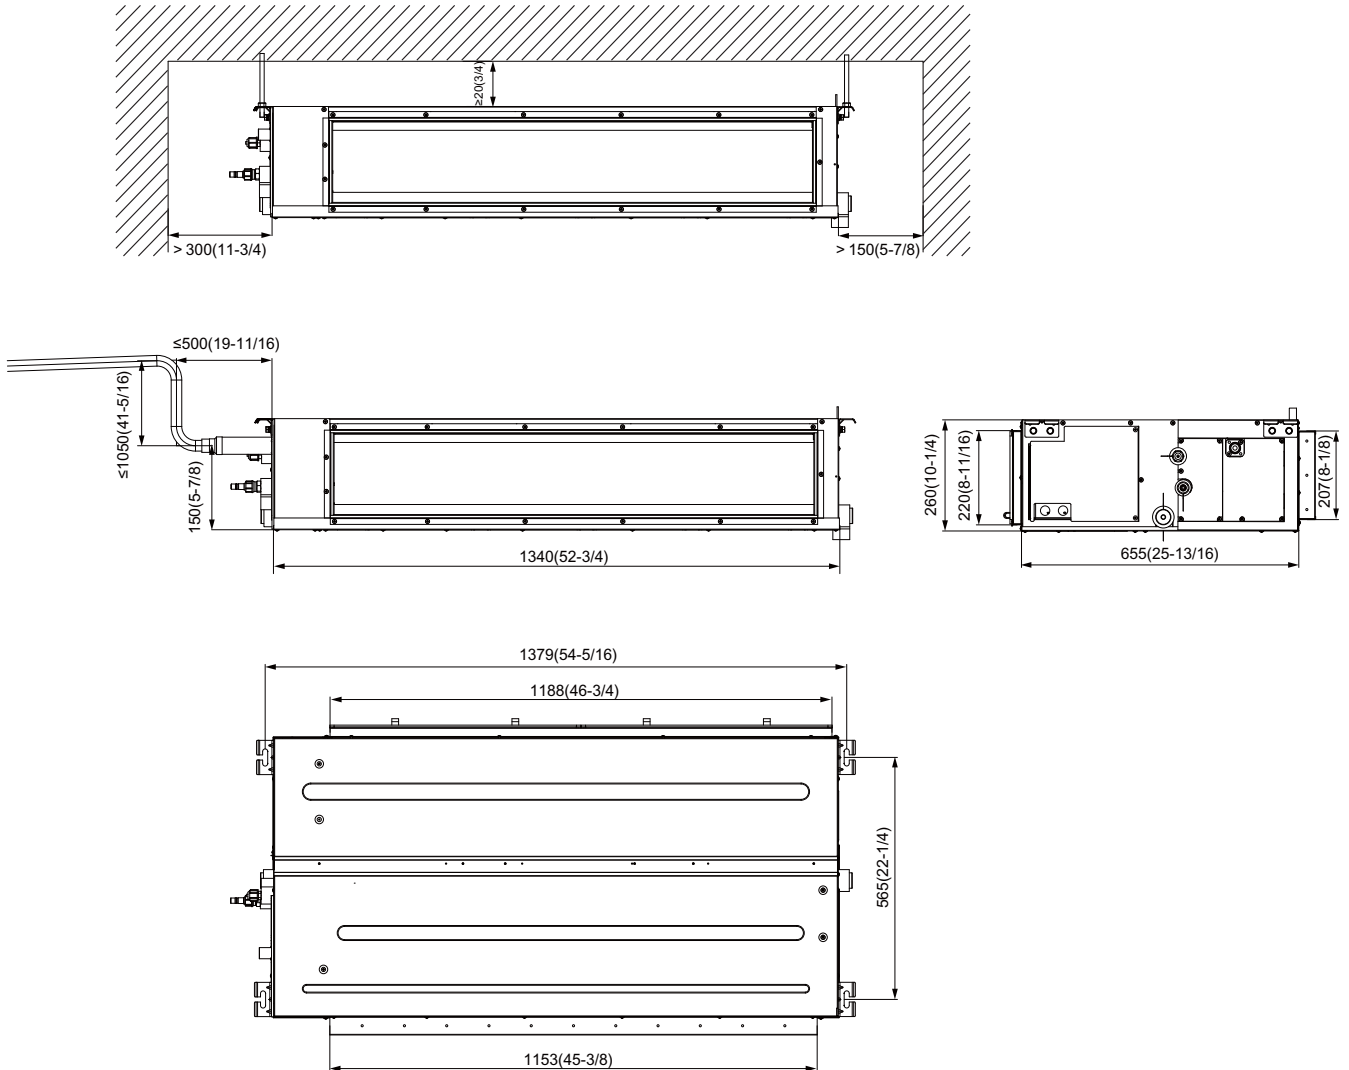

Unit:mm(in.)

