


208~230V Compact Ceiling Cassette

Model:GMV-ND15T/NhE-T(U)

Standard Remote




YAP1F



Specifications	Unit	Parameter
Model	-	GMV-ND15T/NhE-T(U)
Performance		
Rated Cooling Capacity	Btu/h	15,000
Rated Heating Capacity	Btu/h	17,000
Sound Pressure Level	dB(A)	37 / 35 / 30
Electrical Data		
Power Supply	Voltage/Phase/ Hertz	208/230V, 1Ph, ~60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	.5
Fan		
Type x Quantity	-	Centrifugal X 1
Air Flow Volume	CFM	360 / 320 / 280
ESP	In W.c.	-
Refrigerant Piping		
Connection Pipe	Gas (Inch) / Liquid (Inch)	1/2" / 1/4"
	Drain (In)	1"
Connection Method	-	Flared
Refrigerant	-	R32
Dimension/Weight		
Dimension (WxDxH)	inch	22-7/16 x 22-7/16 x 10-7/16
Net Weight	lbs	37.5
Other		
Safety Certification	-	ETL
A2L Compliant Refrigerant Leak Sensor	-	Factory Installed
Panel/Grille	-	TF05

Outline and Physical Dimensions of GMV-ND15T/NhE-T(U)

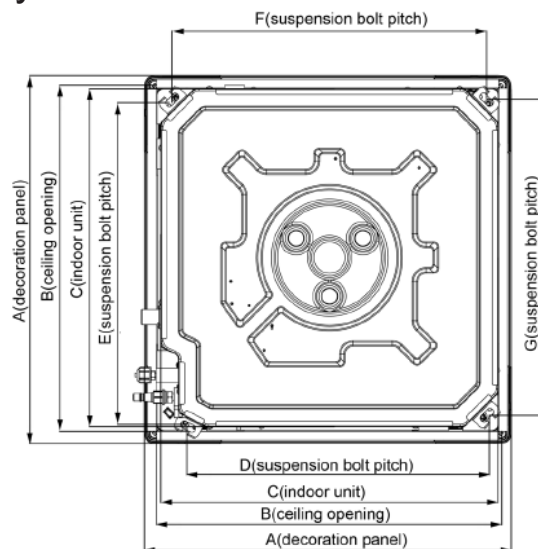


Unit: mm (inch)

Model	A	B	C	D	E	F	G
GMV-ND05T/NhE-T(U)							
GMV-ND07T/NhE-T(U)							
GMV-ND09T/NhE-T(U)	620	580	570	505	550	530	530
GMV-ND12T/NhE-T(U)	(24-3/8)	(22-13/16)	(22-7/16)	(19-7/8)	(22-5/8)	(20-7/8)	(20-7/8)
GMV-ND15T/NhE-T(U)							
GMV-ND18T/NhE-T(U)							

3.5.2 Installation Space

Unit: mm (inch)

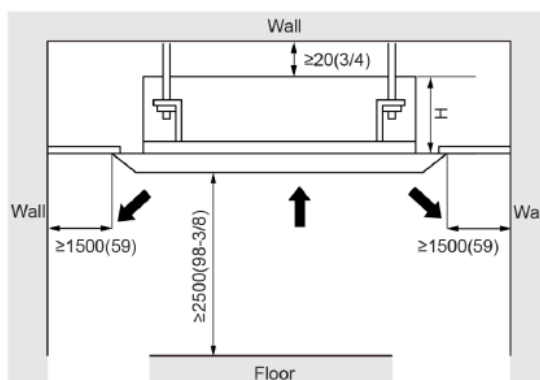

Unit: mm (inch)

Model	H
GMV-ND18T/NhE-T(U)	
GMV-ND15T/NhE-T(U)	
GMV-ND12T/NhE-T(U)	
GMV-ND09T/NhE-T(U)	305(12)
GMV-ND07T/NhE-T(U)	
GMV-ND05T/NhE-T(U)	

Unit:mm(in.)

