

## 208~230V Low ESP Fan Coil


### Model:GMV-ND22PLS/A-T(U)



| Specifications                       | Unit                  | Parameter                                |
|--------------------------------------|-----------------------|------------------------------------------|
| Model                                | —                     | GMV-ND22PLS/A-T(U)                       |
| <b>Performance</b>                   |                       |                                          |
| Rated Cooling Capacity               | kBtu/h                | 24                                       |
| Rated Heating Capacity               | kBtu/h                | 27                                       |
| Sound Pressure Level                 | dB(A)                 | 30/33/35                                 |
| <b>Electrical Data</b>               |                       |                                          |
| Power Supply                         | Voltage, Phase, Hertz | 208/230, 1, 60                           |
| Maximum Overcurrent Protection (MOP) | A                     | 15                                       |
| Minimum Circuit Amps (MCA)           | A                     | 1                                        |
| <b>Fan</b>                           |                       |                                          |
| Type × Quantity                      | —                     | Centrifugal x4                           |
| Air Flow Volume                      | CFM                   | 353/471/589                              |
| ESP                                  | Pa                    | 15/0~30                                  |
| Fan Motor Running Current            | A                     | 0.7                                      |
| Fan Motor Power Output               | W                     | 60                                       |
| <b>Refrigerant Piping</b>            |                       |                                          |
| Connection Pipe                      | Gas(mm/inch)          | Φ15.9/Φ5/8                               |
|                                      | Liquid(mm/inch)       | Φ9.52/Φ3/8                               |
| Connection method                    | —                     | Flare Connection                         |
| Refrigerant                          | —                     | R410A                                    |
| <b>Dimension/Weight</b>              |                       |                                          |
| Dimensions (H×W×D)                   | mm/inch               | 200×1100×615/<br>(7-7/8×43-5/16×24-3/16) |
| Net Weight                           | kg/lbs                | 31/68                                    |
| <b>Other</b>                         |                       |                                          |
| Safety Certification                 | —                     | ETL                                      |

|                       |  |       |  |
|-----------------------|--|-------|--|
| Job Name:             |  | Date: |  |
| System Reference No.: |  |       |  |
| Engineer Signature:   |  |       |  |

### Outline and Physical Dimensions of GMV-ND22PLS/A-T(U).

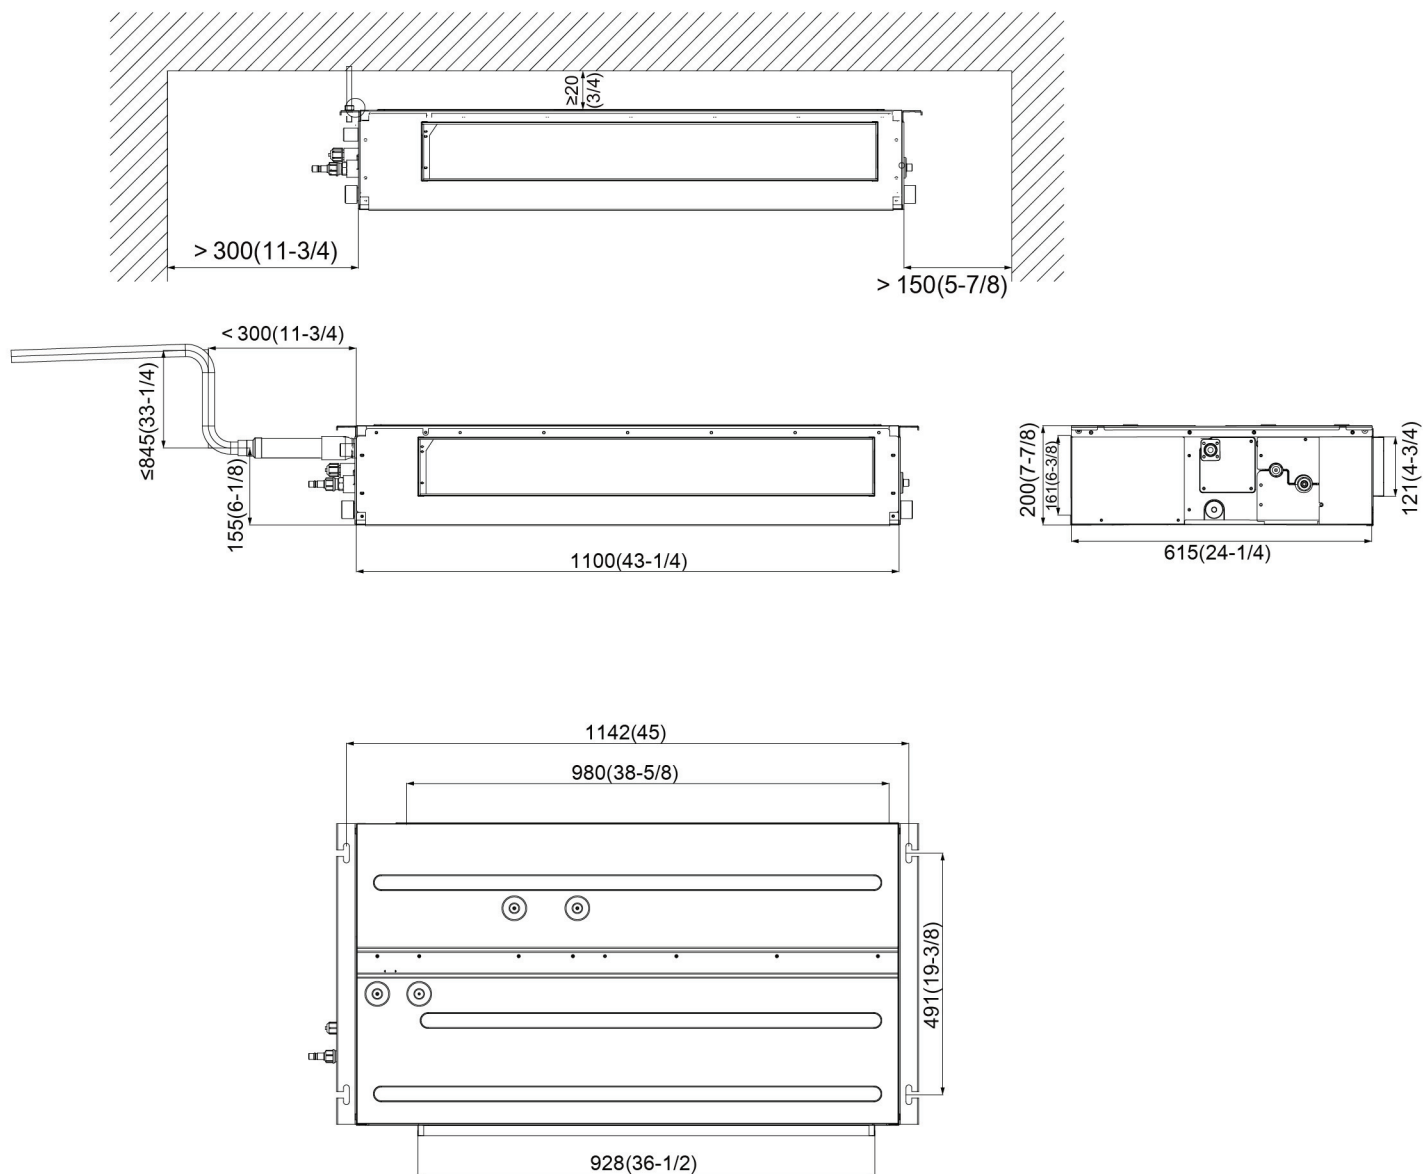

Unit:mm(in.)

